



# Dell Latitude E6410 Screen Replacement

In this guide you will be shown how to remove the entire screen assembly from the dell latitude e6410 laptop and replace it.

Written By: Esteban Damian



## INTRODUCTION

Use this guide to replace the entire dell latitude e6410 screen assembly. All you need to do is remove the entire old screen assembly and replace it with the new screen that you will be installing.

Use this guide only to replace the entire screen assembly. "Screen assembly" refers to the all of the screen components fully assembled into the screen case (display, camera, and other components are installed as a single piece ).



### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Dell Latitude E6410 Screen



- Remove the battery from the laptop by sliding both the clips inwards and sliding the battery out.

**i** It is always important to remove an electronic device's power source when taking it apart to prevent electrocution.

## Step 2



- Remove both the 5 mm Phillips screws located on the left and right side of the battery socket on the back of the laptop.



## Step 3




- Slide off both the grey case pieces from the back by pulling them towards you.

## Step 4




- Remove the two 5mm phillips screws in the bottom right and the top left corners of the back panel.
  - Remove the 3mm phillips screw that is near the bottom right corner.
  - Loosen the phillips screw that is near the center until the spring pops up, but do not remove it.
  - Then detach the back case panel by sliding it away from the location of the battery and then lifting out of place.
- ✎ When reattaching the back panel slide it towards the location of the battery instead of away from it while also applying pressure downwards.

## Step 5

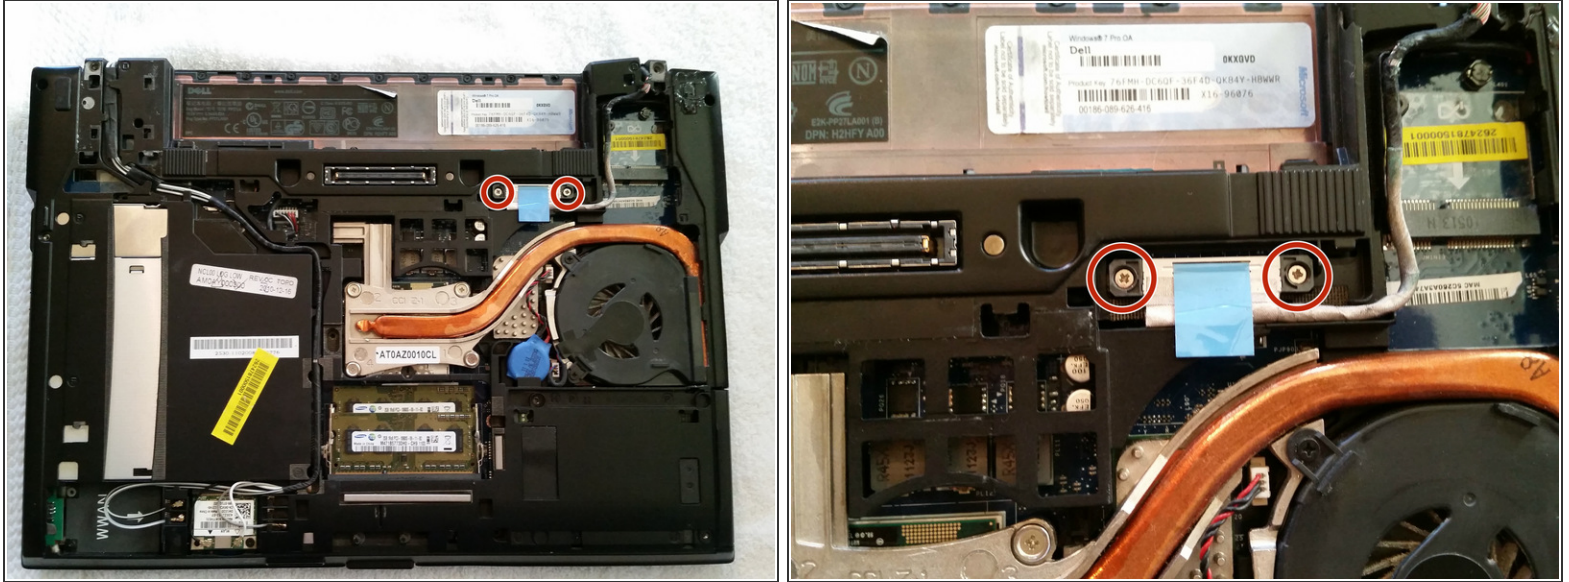

- Loosen the two 5mm phillips screws near the top right corner that are holding the display cable onto the motherboard.

## Step 6

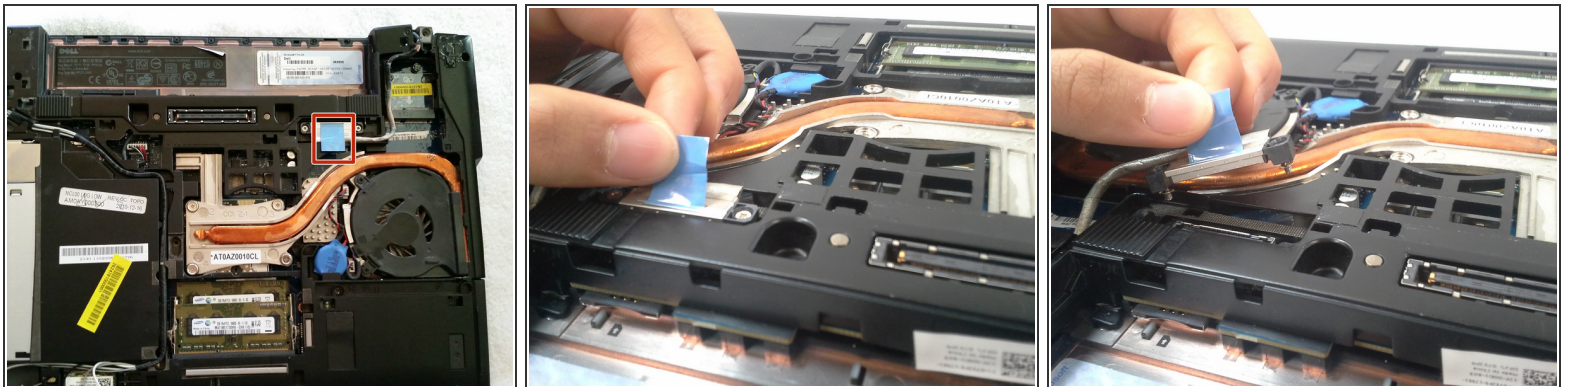


- Detach the display cord from the motherboard by grabbing the blue tab in between your thumb and index finger and carefully pulling upwards.

⚠ Don't pull too hard or you may rip off the tab, but apply enough pressure so that it actually comes off.



## Step 7

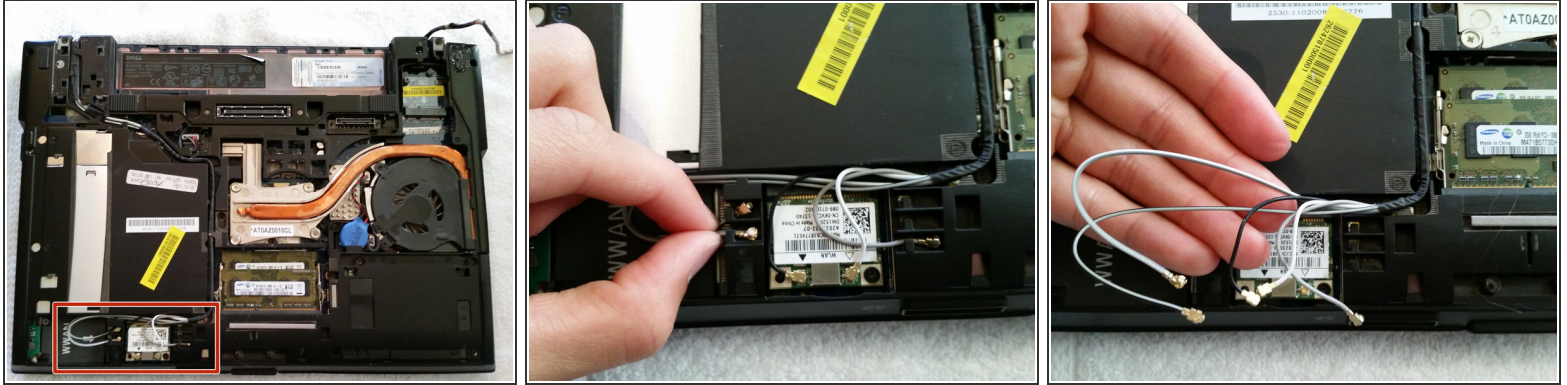


- Detach the grey, black, and white wires from the graphics card as well as the wires that are hooked into place located near the bottom left corner by carefully unhooking them or pulling them off.
- ☞ When reassembling use the second or last picture to reference where each wire goes.

## Step 8



- Carefully unthread the wires that were detached in the last step from the hooks that hold them into the case until it is completely free from the laptop.

## Step 9

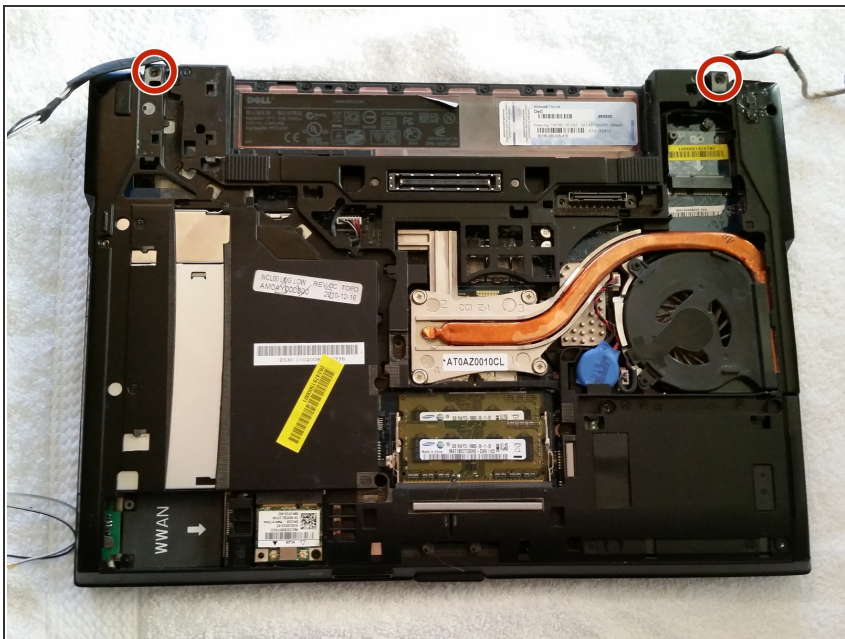

- Remove the two 5mm Phillips screws that are in the top right and left corners of the laptop.

## Step 10



- Flip over the laptop and grasp the back two corners of the laptop screen and pull upwards to remove the screen.

✦ When reassembling use the new laptop screen.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-14 12:26:57 AM.